


Multiplexing:-

Multiplexing is the process of combining multiple signals into one signal, over a shared medium. These signals, if analog in nature, the process is called as **analog multiplexing**. If digital signals are multiplexed, it is called as **digital multiplexing**.

Multiplexing was first developed in telephony. A number of signals were combined to send through a single cable. The process of multiplexing divides a communication channel into several number of logical channels, allotting each one for a different message signal or a data stream to be transferred. The device that does multiplexing, can be called as a **MUX**. The reverse process, i.e., extracting the number of channels from one, which is done at the receiver is called as **de-multiplexing**. The device which does de-multiplexing is called as **DEMUX**.


The following figures represent MUX and DEMUX. Their primary use is in the field of communications.

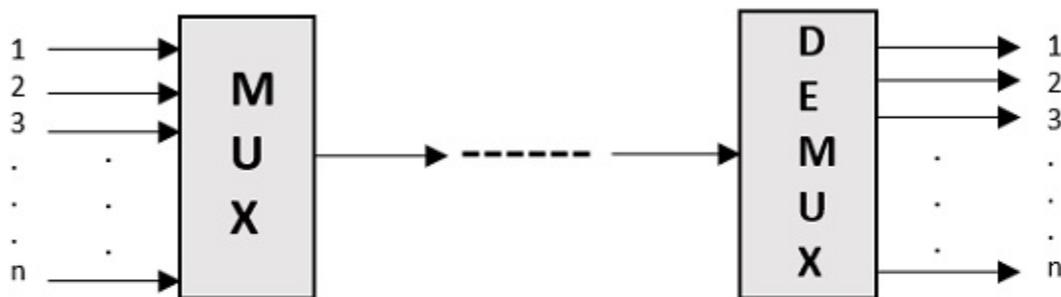

Multiplexing and Demultiplexing

Types of Multiplexers:-

There are mainly two types of multiplexers, namely analog and digital. They are further divided into FDM, WDM, and TDM. The following figure gives a detailed idea on this classification.

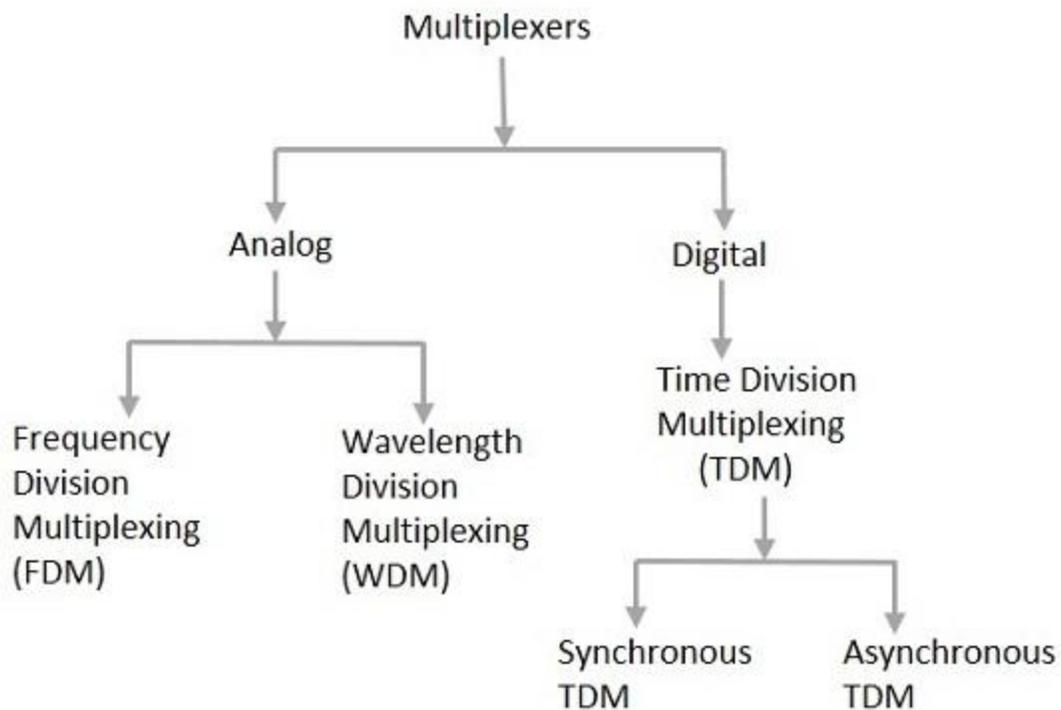

Actually, there are many types of multiplexing techniques. Of them all, we have the main types with general classification, mentioned in the above figure.

Analog Multiplexing:-

The analog multiplexing techniques involve signals which are analog in nature. The analog signals are multiplexed according to their frequency FDM or wavelength WDM.

Frequency Division Multiplexing FDM

In analog multiplexing, the most used technique is **Frequency Division Multiplexing** FDM. This technique uses various frequencies to combine streams of data, for sending them on a communication medium, as a single signal.

Example – A traditional television transmitter, which sends a number of channels through a single cable, uses FDM.

Wavelength Division Multiplexing WDM

Wavelength Division multiplexing is an analog technique, in which many data streams of different wavelengths are transmitted in the light spectrum. If the wavelength increases, the frequency of the signal decreases. A **prism** which can turn different wavelengths into a single line, can be used at the output of MUX and input of DEMUX.

Example – Optical fiber communications use WDM technique to merge different wavelengths into a single light for communication.

Digital Multiplexing:-

The term digital represents the discrete bits of information. Hence, the available data is in the form of frames or packets, which are discrete.

Time Division Multiplexing TDM

In TDM, the time frame is divided into slots. This technique is used to transmit a signal over a single communication channel, by allotting one slot for each message.

Of all the types of TDM, the main ones are Synchronous and Asynchronous TDM.

Synchronous TDM

In Synchronous TDM, the input is connected to a frame. If there are 'n' number of connections, then the frame is divided into 'n' time slots. One slot is allocated for each input line.

In this technique, the sampling rate is common to all signals and hence the same clock input is given. The MUX allocates the same slot to each device at all times.


Asynchronous TDM

In Asynchronous TDM, the sampling rate is different for each of the signals and a common clock is not required. If the allotted device, for a time-slot, transmits nothing and sits idle, then that slot is allotted to another device, unlike synchronous. This type of TDM is used in Asynchronous transfer mode networks.


Regenerative Repeater

For any communication system to be reliable, it should transmit and receive the signals effectively, without any loss. A PCM wave, after transmitting through a channel, gets distorted due to the noise introduced by the channel.

The regenerative pulse compared with the original and received pulse, will be as shown in the following figure.

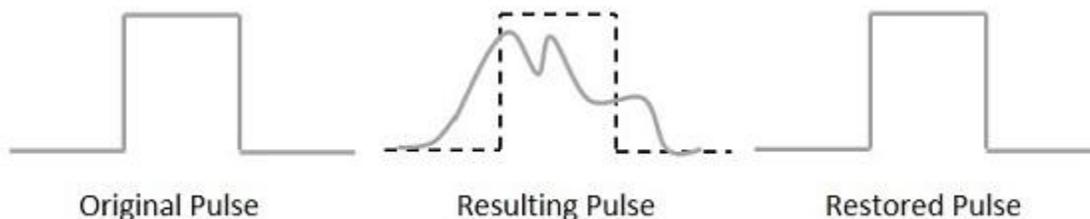

For a better reproduction of the signal, a circuit called as regenerative repeater is employed in the path before the receiver. This helps in restoring the signals from the losses occurred. Following is the diagrammatical representation.

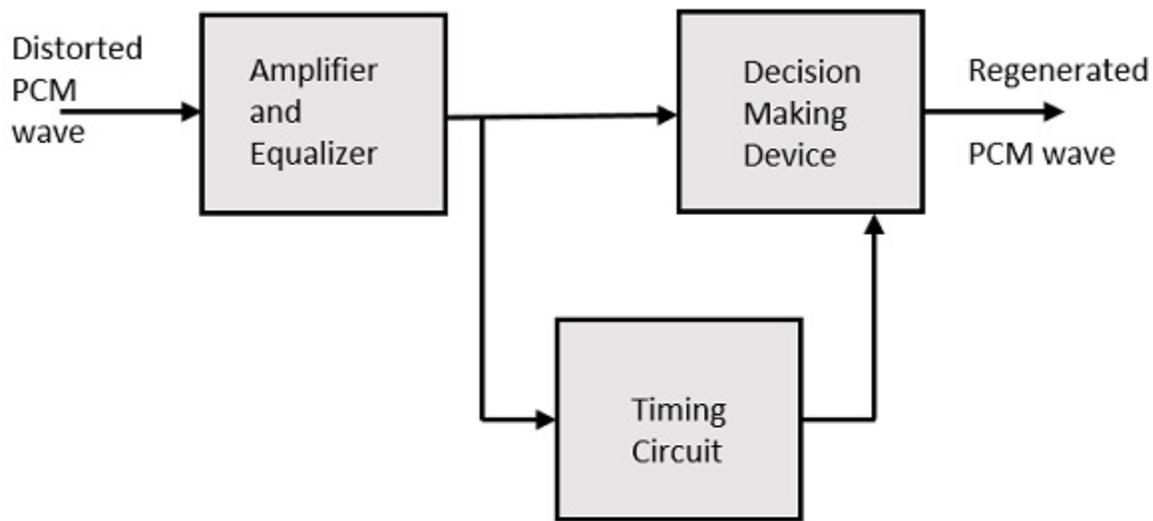

Block diagram of a regenerative repeater

This consists of an equalizer along with an amplifier, a timing circuit, and a decision making device. Their working of each of the components is detailed as follows.

Equalizer

The channel produces amplitude and phase distortions to the signals. This is due to the transmission characteristics of the channel. The Equalizer circuit compensates these losses by shaping the received pulses.

Timing Circuit

To obtain a quality output, the sampling of the pulses should be done where the signal to noise ratio S_{NR}/N_{NR} is maximum. To achieve this perfect sampling, a periodic pulse train has to be derived from the received pulses, which is done by the timing circuit.

Hence, the timing circuit, allots the timing interval for sampling at high SNR, through the received pulses.

Decision Device

The timing circuit determines the sampling times. The decision device is enabled at these sampling times. The decision device decides its output based on whether the amplitude of the quantized pulse and the noise, exceeds a pre-determined value or not.

These are few of the techniques used in digital communications. There are other important techniques to be learned, called as data encoding techniques. Let us learn about them in the subsequent chapters, after taking a look at the line codes.